


Rotary Seal

GVP

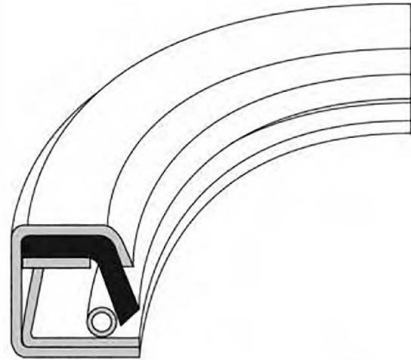


GVP

Material	Pressure (Bar)	Temp. (°c)	Dimension	
			mm.	Inch.
FPM - METAL	5	-40 + 100	●	●
FPM - FPM		-30 +200		

- Good chemical resistance.
- Possible for any size any quantity.
- Good radial stiffness, especially for large diameters.
- Long service life.

Installation Recommendation

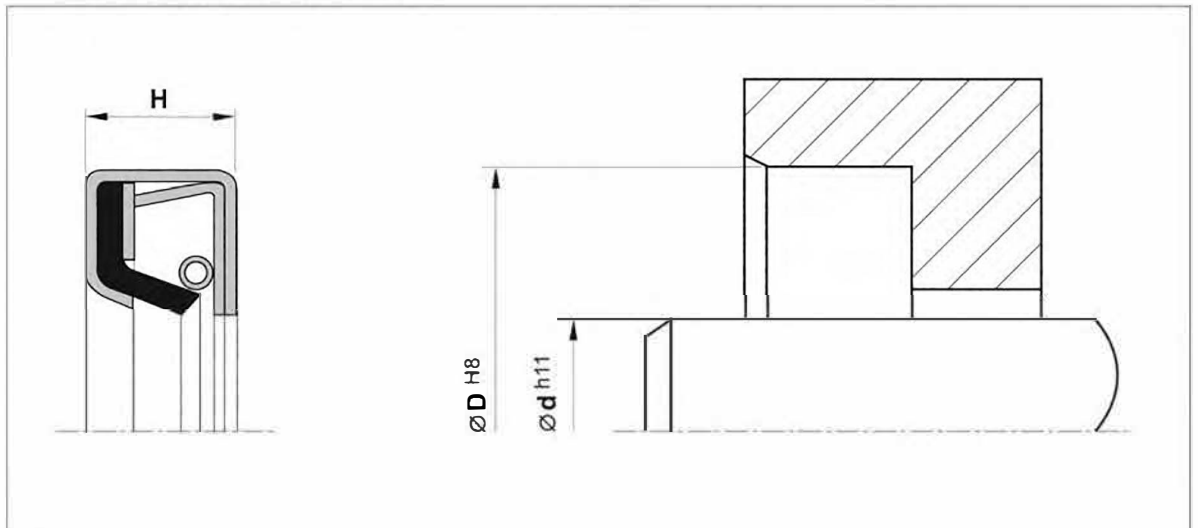

Surface roughness

Sliding surface

$\leq 0.3 \mu\text{m}$

$\leq 2 \mu\text{m}$

Surface of housing

$\leq 1.8 \mu\text{m}$

$\leq 10 \mu\text{m}$

Sides of housing

$\leq 3.0 \mu\text{m}$

$\leq 16 \mu\text{m}$