


## Rotary Seal

R

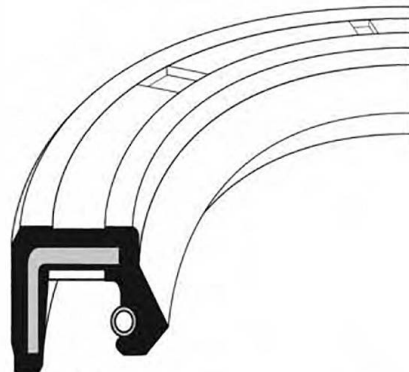


R

Material	Pressure (Bar)	Temp. ( °c)	Dimension	
			mm.	Inch.
NBR - METAL	0.5	-35 +100	●	●

- Good static sealing.
- Compensation of different thermal expansion.
- No risk of fretting corrosion.
- Modern lip design.

Seals & O-rings Specialist

### Installation Recommendation

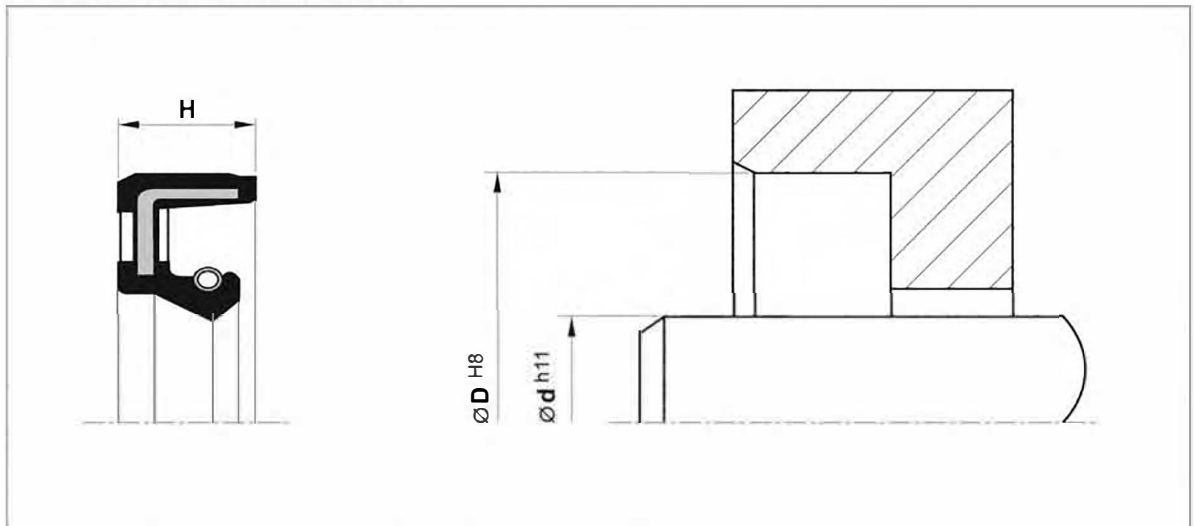

### Surface roughness

Ra

Rt

Sliding surface

≤ 0.3 µm

≤ 2 µm

Surface of housing

≤ 1.8 µm

≤ 10 µm

Sides of housing

≤ 3.0 µm

≤ 16 µm