


## Rotary Seal

### TC

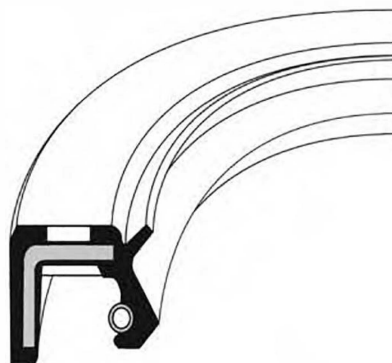


TC

| Material    | Pressure (Bar) | Temp. (°c)  | Dimension |       |
|-------------|----------------|-------------|-----------|-------|
|             |                |             | mm.       | Inch. |
| NBR - METAL | 0.5            | -35<br>+100 | ●         | ●     |

- Good static sealing.
- Effective protection against contaminants.
- Higher surface roughness is allowed.
- Installation in split housing.

### Installation Recommendation

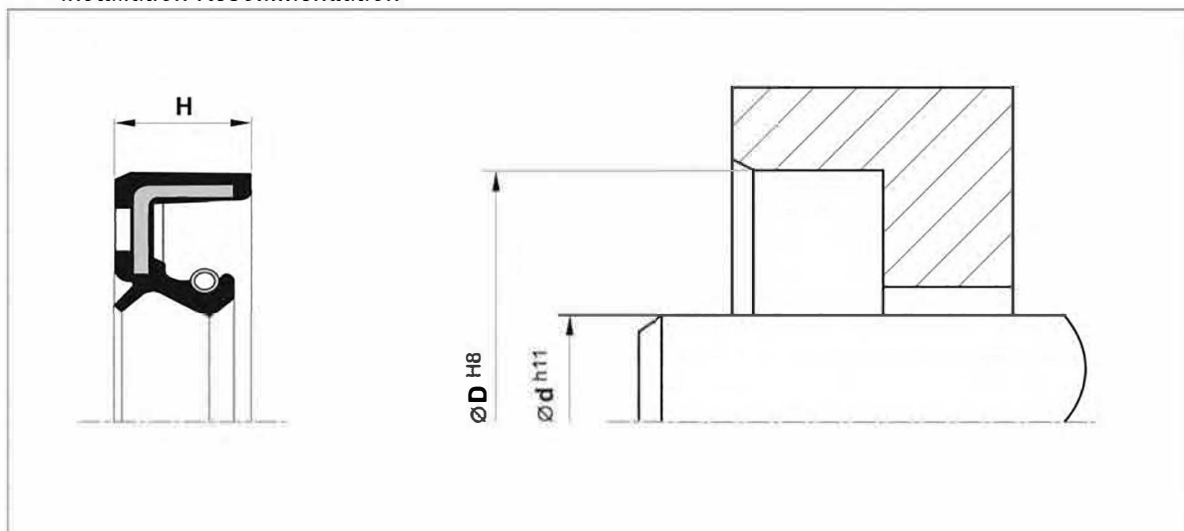

### Surface roughness

Ra

Rt

Sliding surface

$\leq 0.3 \mu\text{m}$

$\leq 2 \mu\text{m}$

Surface of housing

$\leq 1.8 \mu\text{m}$

$\leq 10 \mu\text{m}$

Sides of housing

$\leq 3.0 \mu\text{m}$

$\leq 16 \mu\text{m}$