


Rotary Seal

VC

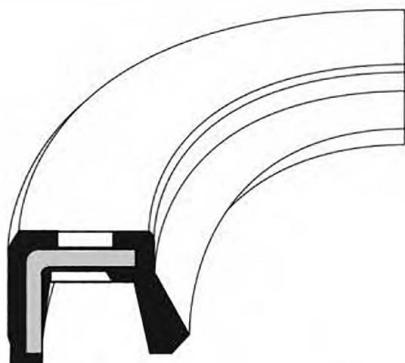


VC

Material	Temp. (°c)	Dimension mm. Inch.
NBR - METAL	-35 +100	• •

- Good static sealing and thermal expansion compensation.
- Low friction and low heat generation.
- Compact design.
- Suitable for scraper application .

Seals & O-rings Specialist

Installation Recommendation

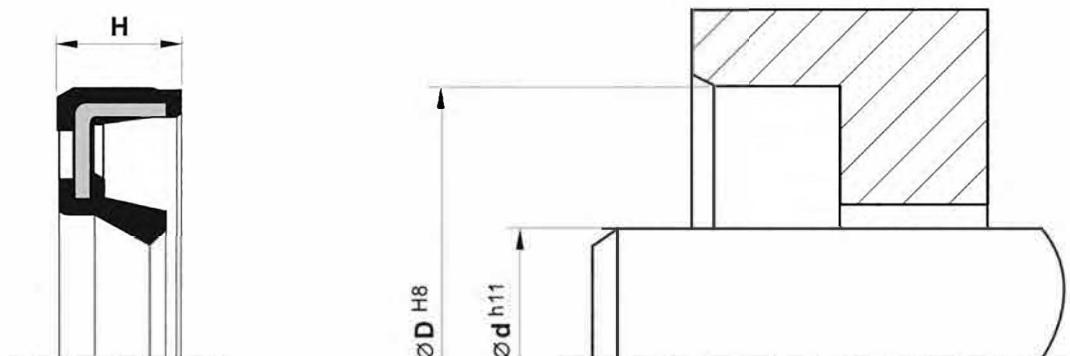

Surface roughness	Ra	Rt
Sliding surface	$\leq 0.3 \mu\text{m}$	$\leq 2 \mu\text{m}$
Surface of housing	$\leq 1.8 \mu\text{m}$	$\leq 10 \mu\text{m}$
Sides of housing	$\leq 3.0 \mu\text{m}$	$\leq 16 \mu\text{m}$