

Rotary Seal


ZF



Material	Pressure (Bar)	Temp(°C)	Dimension	
			mm.	inch.
NBR	-	-40 +120	●	

- Trapezoidal-grooved oil seal that is used in an anti-friction bearing block.
- Not recommend for high dust applications.

Installation Recommendation

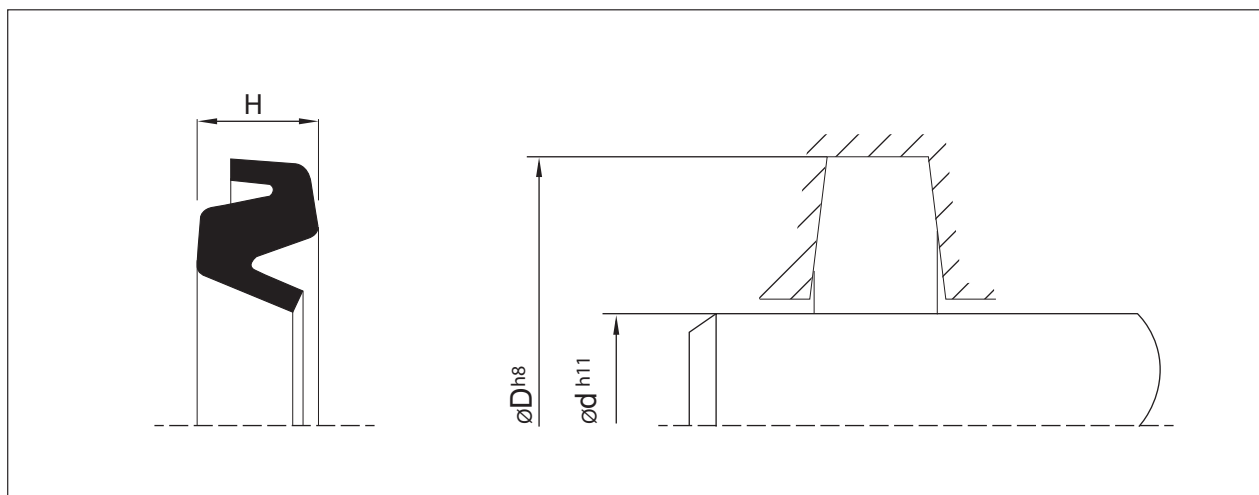

Surface roughness	Ra	Rt
Sliding surface	$\leq 0.3 \mu\text{m}$	$\leq 2 \mu\text{m}$
Surface of housing	$\leq 1.8 \mu\text{m}$	$\leq 10 \mu\text{m}$
Sides of housing	$\leq 3.0 \mu\text{m}$	$\leq 16 \mu\text{m}$