


Rotary Seal

TC (NBR)

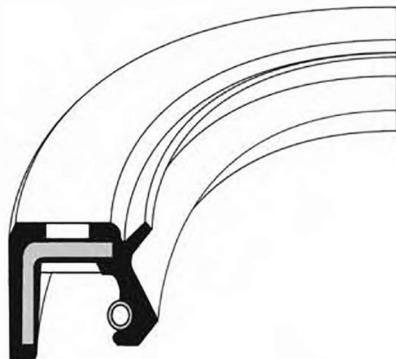


TC (NBR)

| Material | Pressure (Bar) | Temp. (°C) | Dimension mm. Inch. |
|-----------|----------------|-------------|------------------------|
| NBR-METAL | 0.5 | -35 +100 | • • |

- Good static sealing.
- Effective protection against contaminants.
- Higher surface roughness is allowed.
- Installation in split housing.

Seals & O-rings Specialist

Installation Recommendation

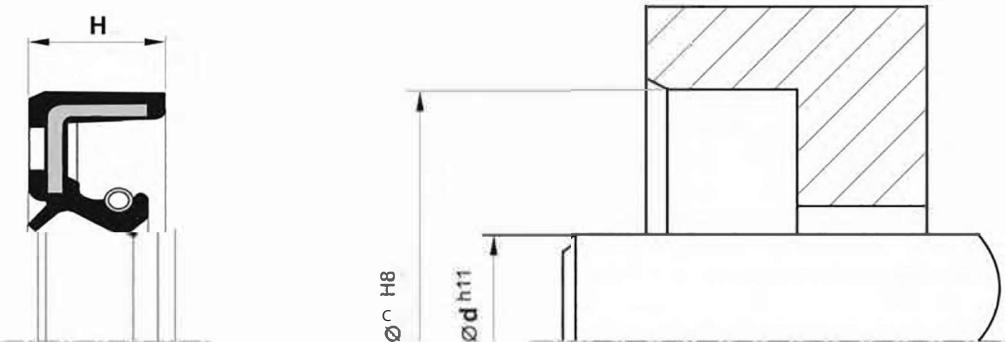

| Surface roughness | Ra | Rt |
|--------------------|------------------------|-----------------------|
| Sliding surface | $\leq 0.3 \mu\text{m}$ | $\leq 2 \mu\text{m}$ |
| Surface of housing | $\leq 1.8 \mu\text{m}$ | $\leq 10 \mu\text{m}$ |
| Sides of housing | $\leq 3.0 \mu\text{m}$ | $\leq 16 \mu\text{m}$ |