


CM 301



Pressure (BAR)	Temp. (°c)	Speeds (m/s)
6	-30+200°C	10

Used in clean water pumps, circulation pumps.

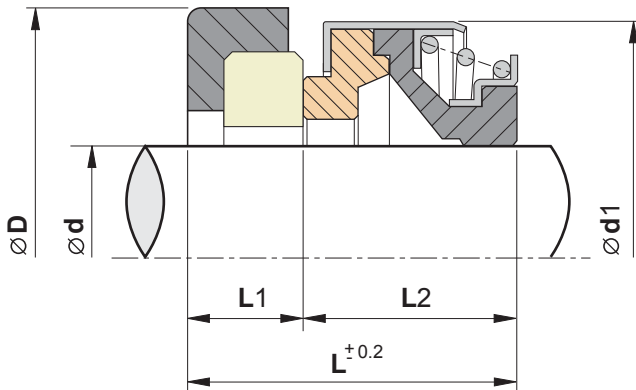

Mechanical seal

CM 301

d	d1	D	L	L1	L2	Reference	d	d1	D	L	L1	L2	Reference
6	18.0	22.0	15.0	4.0	11.0	CM301-6	22	39.0	42.0	21.0	8.0	13.0	CM301-22P
8	18.0	22.0	15.0	4.0	11.0	CM301-8	22	42.0	45.0	23.0	10.0	13.0	CM301-22
8	24.0	26.0	19.0	8.0	11.0	CM301-8L	23	47.0	50.0	23.5	10.0	13.5	CM301-23
10	24.0	26.0	21.0	8.0	13.0	CM301-10	24	47.0	50.0	23.5	10.0	13.5	CM301-24
11	24.0	26.0	21.0	8.0	13.0	CM301-11	25	47.0	50.0	23.5	10.0	13.5	CM301-25
12	24.0	26.0	21.0	8.0	13.0	CM301-12	25	42.0	45.0	23.0	10.0	13.0	CM301-25P
13	24.0	26.0	18.5	5.5	13.0	CM301-13	26	47.0	50.0	23.5	10.0	13.5	CM301-26
13	27.5	30.0	21.0	8.0	13.0	CM301-13L	27	47.0	50.0	23.5	10.0	13.5	CM301-27
14	27.5	28.5	21.0	8.0	13.0	CM301-14P	28	54.0	57.0	25.0	10.0	15.0	CM301-28
14	32.0	29.5	21.0	7.5	13.5	CM301-14	30	54.0	57.0	25.0	10.0	15.0	CM301-30
15	27.5	30.0	21.0	8.0	13.0	CM301-15P	32	54.0	57.0	25.0	10.0	15.0	CM301-32
15	32.0	29.5	21.0	7.5	13.5	CM301-15	35	60.0	63.0	26.0	10.0	16.0	CM301-35
16	27.5	30.0	21.0	8.0	13.0	CM301-16P	38	65.0	68.0	30.0	12.0	18.0	CM301-38
16	32.0	29.5	21.0	7.5	13.5	CM301-16	40	65.0	68.0	30.0	12.0	18.0	CM301-40
16	39.0	42.0	21.0	8.0	13.0	CM301-16L	45	70.0	73.0	32.0	12.0	20.0	CM301-45
17	39.0	42.0	21.0	8.0	13.0	CM301-17	50	85.0	88.0	38.0	15.0	23.0	CM301-50
18	39.0	42.0	21.0	8.0	13.0	CM301-18	55	85.0	88.0	38.0	15.0	23.0	CM301-55
19	39.0	42.0	21.0	8.0	13.0	CM301-19	60	105.0	110.0	45.0	15.0	30.0	CM301-60
20	35.0	38.0	21.0	8.0	13.0	CM301-20P	65	105.0	110.0	45.0	15.0	30.0	CM301-65
20	39.0	42.0	21.0	8.0	13.0	CM301-20	70	105.0	110.0	47.0	15.0	32.0	CM301-70
20	42.0	45.0	23.0	10.0	13.0	CM301-20L							