


## CM 560



Pressure (BAR)	Temp. (°c)	Speeds (m/s)
8	-40+150°C	10

- Used in auto-cooling pumps, centrifugal pumps, submersible pumps, and general industrial pumps.

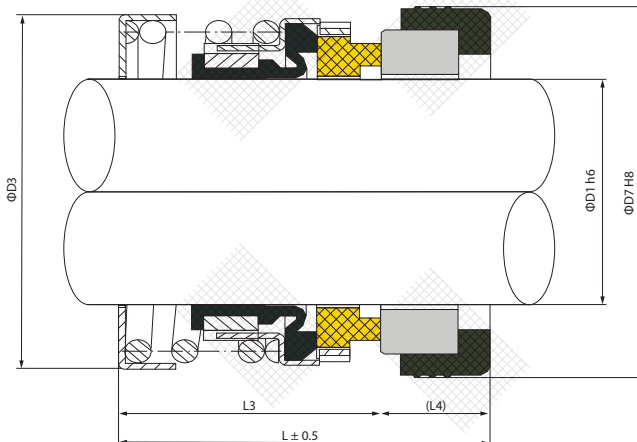

# Mechanical seal

## CM 560

D1	D3	D7	L	L3	L4	Reference
8	17.5	21	18.9	13.9	5.0	CM560A-8
10	23.5	24	23.0	16.5	6.5	CM560A-10
11	23.5	24	23.0	16.5	6.5	CM560A-11
12	26.0	26	24.0	17.5	6.5	CM560A-12
14	28.0	28	25.0	18.0	7.0	CM560A-14
15	28.0	28	25.0	18.0	7.0	CM560A-15
16	30.0	32	27.0	20.0	7.0	CM560A-16
18	32.5	35	26.0	19.0	7.0	CM560A-18
19	32.5	35	26.0	18.0	8.0	CM560A-19
20	35.6	38	28.0	19.5	8.5	CM560A-20
22	37.5	40	28.0	20.0	8.0	CM560A-22
25	42.0	44	29.0	20.0	9.0	CM560A-25
28	45.5	46	30.0	21.0	9.0	CM560A-28
30	48.0	50	31.0	22.0	9.0	CM560A-30
32	50.0	54	33.0	24.0	9.0	CM560A-32
35	54.5	58	36.0	26.0	10.0	CM560A-35
38	58.5	60	37.0	27.0	10.0	CM560A-38
40	62.5	64	38.0	28.0	10.0	CM560A-40
45	66.5	66	40.0	30.0	10.0	CM560A-45
50	72.5	72	42.0	32.0	10.0	CM560A-50

D1	D3	D7	L	L3	L4	Reference
9.53		22.2	28.5	22.2	6.3	CM560B-3/8"
12.70	23.0	25.4	30.2	22.2	8.0	CM560B-1/2"
15.88	26.5	31.8	32.5	22.2	10.3	CM560B-5/8"
19.05	30.5	35.0	32.5	22.2	10.3	CM560B-3/4"
22.23	34.0	38.1	34.3	24.0	10.3	CM560B-7/8"
25.40	40.0	41.3	36.4	25.4	11.0	CM560B-1"
28.58	44.5	44.5	38.0	27.0	11.0	CM560B-1 1/8"
31.75	46.5	47.7	38.0	27.0	11.0	CM560B-1 1/4"
34.93	51.5	50.8	39.5	28.5	11.0	CM560B-1 3/8"
38.10	54.0	54.0	39.5	28.5	11.0	CM560B-1 1/2"
41.28	58.0	60.3	47.7	35.0	12.7	CM560B-1 5/8"
44.45	61.5	63.5	47.7	35.0	12.7	CM560B-1 3/4"
47.63	65.5	66.7	50.7	38.0	12.7	CM560B-1 7/8"
50.80	70.5	69.9	50.7	38.0	12.7	CM560B-2"
53.98	75.0	76.2	57.3	43.0	14.3	CM560B-2 1/8"
57.15	79.0	79.4	57.3	43.0	14.3	CM560B-2 1/4"
60.33	82.0	82.6	60.3	46.0	14.3	CM560B-2 3/3"
63.50	86.0	85.7	60.3	46.0	14.3	CM560B-2 1/2"
66.68	91.5	85.7	65.0	49.0	16.0	CM560B-2 5/8"
69.85	91.5	88.9	65.0	49.0	16.0	CM560B-2 3/4"
73.03	99.0	95.3	68.5	52.5	16.0	CM560B-2 7/8"
76.20	99.0	98.4	68.5	52.5	16.0	CM560B-3"